

# ColorChrome™ Pigment

TECHNICAL DATA SHEET

## DESCRIPTION:

ColorChrome Pigment is a metallic mica pigment designed to be dispersed in a variety of binders to create seamless floors with a unique, three-dimensional appearance. Depending on the application techniques used, the finished floor's appearance can range from elegant to exotic. ColorChrome Pigment is an ideal product for retail establishments, night clubs, automotive showrooms, and residential interiors and garage floors, or any interiors that desire a truly unique finished floor. When combined with the proper binders and finish coats, it can offer an unmatched blend of beauty and durability.

## USES:


- Commercial & Residential Applications
- Areas where durable and elegant flooring is desired
- Dining areas
- Restrooms
- Bars & Night Clubs
- Commercial Interiors
- Sporting Venues
- Residential Interiors
- Garage Floors

## CHEMICAL COMPOSITION:

Pigmented mica flake.

## COLORS:

Available in 20 standard colors.

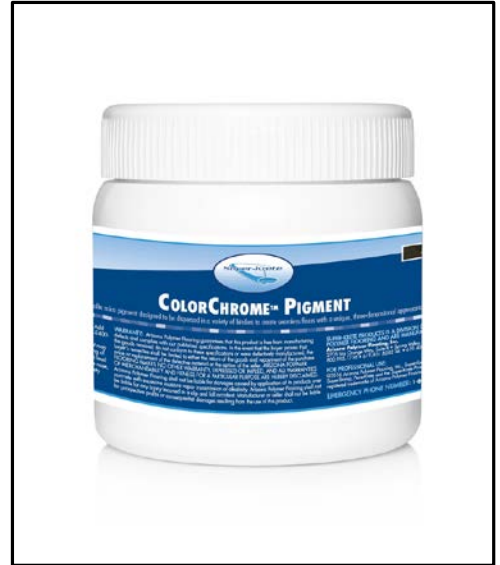

## PACKAGING:

- 8 oz. units
- 2 oz. units

## MOISTURE VAPOR EMISSIONS PRECAUTIONS:

All concrete floors not poured over an effective moisture vapor retarder are subject to possible moisture vapor transmission that may lead to blistering and failure of the coating system. It is the coating applicator's responsibility to conduct calcium chloride testing in compliance with ASTM F1869 and relative humidity probe testing to determine if excessive levels of vapor emissions are present before applying any coatings. Arizona Polymer Flooring offers **S-1300 Pene-Krete®** for cementitious overlay products and **VaporSolve® Moisture Remediation** systems for resinous floor coatings. Consult our technical service department. Arizona Polymer Flooring and its sales agents will not be responsible for coating failures due to undetected moisture vapor emissions.

**Super-Krete® Products is a Division of Arizona Polymer Flooring, Inc.**

© 2017 Arizona Polymer Flooring, Inc.  
4565 W Watkins St. / Phoenix, AZ 85043 / 800.562.4921  
623.435.2277 Tel. / 623.435.8585 Fax

[www.super-krete.com](http://www.super-krete.com)

ColorChrome™ Pigment

032317



**TECHNICAL INFORMATION:****Physical Properties**

Mixing Ratio, by Weight	8 oz. per 1.5 gallons of resin
Solids Content	100%
V.O.C.	None

**LIMITATIONS:**

- Exterior applications must be made with a UV-stable binder.

**WARRANTY:**

Arizona Polymer Flooring guarantees that this product is free from manufacturing defects and complies with our published specifications. In the event that the buyer proves that the goods received do not conform to these specifications or were defectively manufactured, the buyer's remedies shall be limited to either the return of the goods and repayment of the purchase price or replacement of the defective material at the option of the seller. ARIZONA POLYMER FLOORING MAKES NO OTHER WARRANTY, EXPRESSED OR IMPLIED, AND ALL WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE HEREBY DISCLAIMED. Arizona Polymer Flooring shall not be liable for damages caused by application of its products over concrete with excessive moisture vapor transmission or alkalinity. Arizona Polymer Flooring shall not be liable for any injury incurred in a slip and fall accident. Manufacturer or seller shall not be liable for prospective profits or consequential damages resulting from the use of this product.

**Super-Krete® Products is a Division of Arizona Polymer Flooring, Inc.**

© 2017 Arizona Polymer Flooring, Inc  
4565 W Watkins St. / Phoenix, AZ 85043 / 800.562.4921  
623.435.2277 Tel. / 623.435.8585 Fax

[www.super-krete.com](http://www.super-krete.com)

ColorChrome™ Pigment

032317

